


型番：NH14100 (1208lm)

配光曲線図

光度 cd/1000lm

— A-A
— B-B
— C-C

光度(cd/1000lm)				光度(cd/1000lm)			
	A-A	B-B	C-C		A-A	B-B	C-C
-180°	10	12	12	0°	223	223	223
-170°	10	12	12	10°	222	221	222
-160°	10	12	12	20°	212	210	209
-150°	10	12	11	30°	205	193	196
-140°	10	11	10	40°	196	169	180
-130°	9	10	10	50°	182	141	160
-120°	10	10	10	60°	167	109	138
-110°	10	10	11	70°	146	73	115
-100°	23	11	12	80°	124	36	91
-90°	91	12	65	90°	102	13	71
-80°	113	32	85	100°	46	12	15
-70°	136	70	108	110°	12	11	13
-60°	157	105	132	120°	10	10	11
-50°	174	137	155	130°	10	10	10
-40°	189	167	174	140°	10	10	10
-30°	200	190	192	150°	10	11	11
-20°	209	208	205	160°	11	12	11
-10°	214	219	218	170°	10	12	12
0°	223	223	223	180°	10	12	11

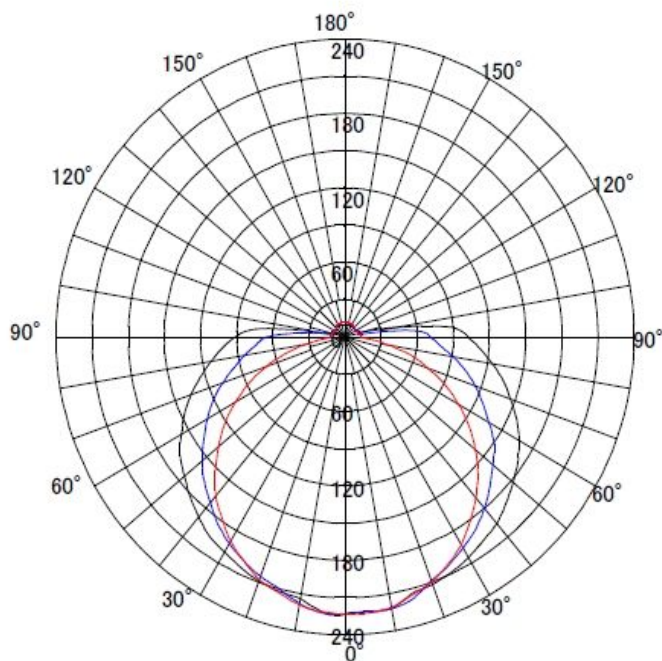

器具効率		最大取付間隔	保守率		
UP 11.3 %	99.8 %	A-A 1.38 H	良	中	否
DN 88.5 %		B-B 1.28 H	74	70	62

反射率 (%)	天井	80						70						50						30				0	
		壁		床		壁		床		壁		床		壁		床		壁		床		壁		床	
		50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	30	10	30	10	0	
室指数	照明率 U (× 0.01)																								
0.6	41	31	25	39	31	25	39	31	25	38	30	24	37	29	24	36	29	24	28	23	29	24	20		
0.8	52	41	34	48	40	34	50	40	34	47	39	33	47	39	33	44	37	32	37	31	37	32	28		
1.0	60	50	43	56	47	41	58	49	42	54	46	40	54	46	40	51	45	39	44	38	45	39	34		
1.25	69	59	51	63	55	49	66	57	50	62	54	48	62	54	48	58	52	46	51	46	52	46	41		
1.5	76	66	58	69	61	55	73	64	57	67	60	54	67	60	54	63	57	52	56	51	57	52	46		
2.0	86	77	70	77	70	65	83	74	68	75	69	63	76	70	64	71	66	61	65	61	66	61	54		
2.5	93	85	78	82	76	71	89	82	76	80	75	70	82	76	71	76	71	67	71	67	71	67	60		
3.0	99	92	86	87	82	77	95	88	83	85	80	76	87	82	78	80	77	73	77	73	77	73	66		
4.0	107	101	96	92	89	85	102	97	92	90	87	84	94	90	86	86	83	80	84	81	83	80	72		
5.0	111	107	102	96	93	90	107	102	99	93	91	88	98	95	92	89	87	85	88	85	87	85	76		