


型番 : NH14200 (2415lm)

光度(cd/1000lm)				光度(cd/1000lm)			
	A-A	B-B	C-C		A-A	B-B	C-C
-180°	11	12	14	0°	229	229	229
-170°	11	12	14	10°	227	225	228
-160°	11	12	14	20°	223	214	219
-150°	11	11	14	30°	216	196	207
-140°	10	11	13	40°	204	171	190
-130°	10	11	13	50°	190	141	168
-120°	11	11	13	60°	171	107	144
-110°	29	11	15	70°	150	70	118
-100°	46	11	35	80°	124	35	94
-90°	56	12	47	90°	58	13	45
-80°	126	32	96	100°	45	12	34
-70°	152	66	121	110°	25	11	14
-60°	174	103	145	120°	11	11	14
-50°	191	139	169	130°	10	11	13
-40°	205	169	191	140°	10	11	13
-30°	217	192	208	150°	11	11	14
-20°	225	213	220	160°	11	12	14
-10°	228	225	228	170°	11	12	14
0°	229	229	229	180°	20	23	24

配光曲線図

光度 cd/1000lm

— A-A  
— B-B  
— C-C

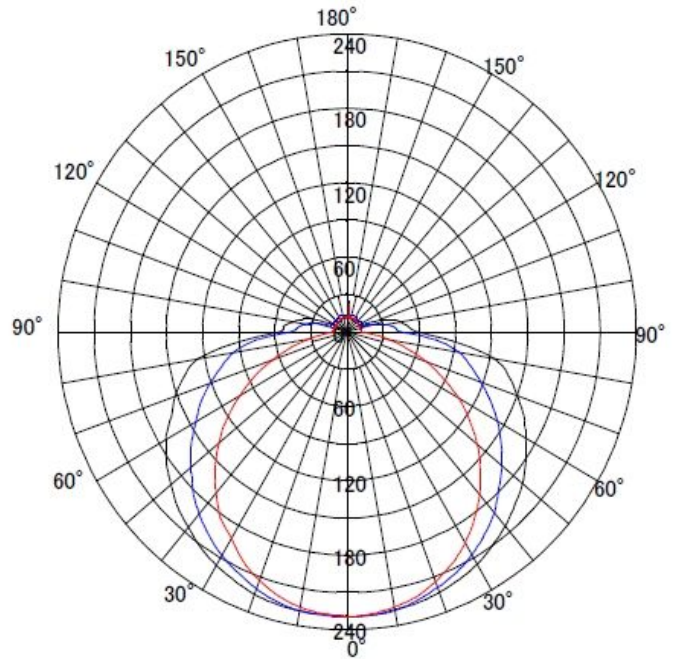

器具効率		最大取付間隔		保守率		
UP 11.4 %	100.2 %	A-A 1.41 H	良	中	否	
DN 88.9 %		B-B 1.26 H	79	74	70	

反射率 (%)	天井	80						70						50						30				0
	壁	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	30	10	30	10	0
		床	30		10		30		10		30		10		30		10		30		10		0	
室指数	照明率 U ( × 0.01 )																							
0.6	42	32	26	40	31	26	40	32	26	39	31	25	38	30	25	37	30	25	29	24	30	25	21	
0.8	53	43	36	50	41	35	51	42	35	48	40	34	48	40	34	46	39	33	38	33	39	33	29	
1.0	62	52	44	57	49	43	60	50	43	56	48	42	56	48	42	53	46	41	45	40	46	41	36	
1.25	71	61	53	65	57	51	68	59	52	63	56	50	63	56	50	60	53	48	53	48	53	48	43	
1.5	77	68	60	70	63	57	75	66	59	68	62	56	69	62	56	65	59	54	58	53	59	54	48	
2.0	88	79	72	79	72	67	85	77	70	77	71	66	78	72	66	73	68	63	67	63	68	63	57	
2.5	95	87	81	84	79	74	91	84	78	82	77	73	84	79	74	78	74	70	74	70	74	70	63	
3.0	101	94	88	89	84	80	97	91	86	86	82	79	90	85	81	82	79	76	79	76	79	76	68	
4.0	109	104	99	94	91	88	104	100	95	92	89	86	96	92	89	88	85	83	86	83	85	83	75	
5.0	114	109	105	98	95	93	109	105	102	95	93	91	100	97	95	91	89	88	90	88	89	88	79	