


型番：NH28100 ( 2602lm)


配光曲線図

— A-A  
— B-B  
— C-C

光度 cd/1000lm

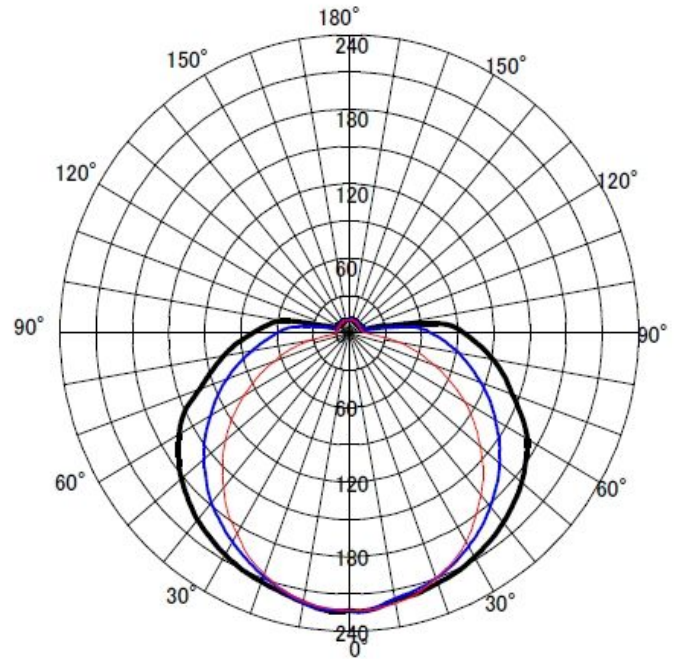

光度(cd/1000lm)				光度(cd/1000lm)			
	A-A	B-B	C-C		A-A	B-B	C-C
-180°	12	11	11	0°	223	223	223
-170°	11	11	11	10°	218	221	217
-160°	11	11	11	20°	214	210	210
-150°	11	11	11	30°	208	194	198
-140°	10	10	11	40°	199	170	182
-130°	10	10	10	50°	187	142	163
-120°	11	10	11	60°	171	111	140
-110°	12	10	11	70°	144	75	116
-100°	57	11	29	80°	121	41	92
-90°	80	11	60	90°	95	13	68
-80°	106	31	82	100°	38	11	13
-70°	132	66	108	110°	12	10	12
-60°	163	101	133	120°	11	10	11
-50°	182	134	157	130°	10	10	10
-40°	196	162	178	140°	10	10	11
-30°	206	186	194	150°	11	11	11
-20°	213	206	208	160°	11	11	11
-10°	220	219	220	170°	11	11	11
0°	223	223	223	180°	11	11	11

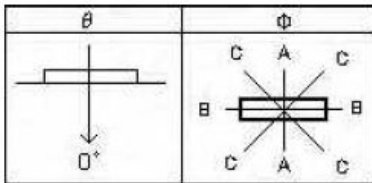

器具効率		最大取付間隔		保守率		
UP	10.7 %	A-A	1.40 H	良	中	否
99.9 %		B-B	1.28 H	74	70	64
DN	89.1 %					

反射率 (%)	天井	80						70						50						30						0	
	壁	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	30	10	30	10	30	10	30	10
	床	30		10		30		10		30		10		30		10		30		10		30		10		0	
室指数	照明率 U ( × 0.01 )																										
0.6	41	32	25	39	31	25	40	31	25	38	30	25	37	30	24	36	29	24	28	23	29	24	20				
0.8	52	42	35	49	40	34	50	41	34	47	39	33	47	39	33	45	38	32	37	32	38	32	28				
1.0	61	50	43	56	48	41	59	49	42	55	47	41	55	47	41	52	45	40	44	39	45	40	35				
1.25	69	59	52	64	56	49	67	58	51	62	54	49	62	55	48	59	52	47	52	46	52	47	42				
1.5	76	66	59	69	61	55	73	64	57	67	60	54	68	61	55	64	58	53	57	52	58	53	47				
2.0	86	77	70	77	71	65	83	75	68	75	69	64	77	70	65	71	66	62	66	61	66	62	55				
2.5	93	85	79	83	77	72	90	82	76	80	75	71	83	77	72	77	72	68	72	68	72	68	61				
3.0	99	92	86	87	82	78	95	89	84	85	80	77	88	83	79	81	77	74	77	74	77	74	66				
4.0	107	101	96	93	89	86	103	98	93	91	87	84	95	91	87	87	84	81	84	82	84	81	73				
5.0	112	107	103	96	93	90	107	103	99	94	91	89	98	95	92	90	88	85	88	86	88	85	77				