

型番：NT14100 (1315lm)


光度(cd/1000lm)			
	A-A	B-B	C-C
-180°	12	12	12
-170°	12	12	12
-160°	12	12	12
-150°	11	11	11
-140°	11	11	11
-130°	32	10	11
-120°	43	11	29
-110°	61	10	39
-100°	79	11	53
-90°	100	12	69
-80°	121	24	88
-70°	141	56	109
-60°	157	89	127
-50°	172	120	147
-40°	181	147	166
-30°	189	169	180
-20°	196	185	191
-10°	200	197	199
0°	201	201	201

光度(cd/1000lm)			
	A-A	B-B	C-C
0°	201	201	201
10°	200	197	199
20°	196	188	191
30°	191	172	180
40°	183	151	166
50°	172	125	149
60°	159	93	129
70°	141	60	109
80°	122	30	89
90°	100	13	69
100°	79	11	52
110°	59	11	36
120°	42	11	26
130°	32	10	13
140°	11	10	11
150°	11	11	12
160°	12	11	12
170°	12	12	12
180°	12	11	11

配光曲線図

光度 cd/1000lm

- A-A
- B-B
- C-C

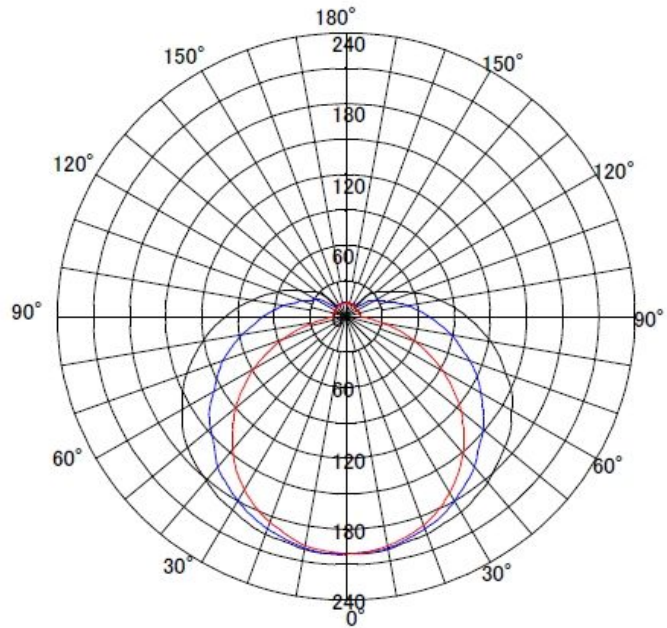

器具効率		最大取付間隔	保守率		
UP 18.3 %	100.2 %	A-A 1.42 H	良	中	否
DN 81.9 %		B-B 1.27 H	74	70	62

反射率 (%)	天井	80						70						50						30						0
	壁	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	30	10	30	10	0		
		床	30			10			30			10			30			10			30			10		
室指数	照明率 U (× 0.01)																									
0.6	40	31	25	38	30	25	39	30	24	37	29	24	36	28	23	35	28	23	27	22	28	23	19			
0.8	51	41	34	48	40	33	49	40	33	46	39	33	45	37	32	43	36	31	35	30	36	31	26			
1.0	60	50	43	56	47	41	57	48	41	54	46	40	53	45	39	50	43	38	42	37	43	38	32			
1.25	69	59	51	63	55	49	66	57	50	61	53	48	60	53	47	57	50	45	49	44	50	45	38			
1.5	75	66	58	68	61	55	72	63	56	66	59	54	66	59	53	62	56	51	54	49	56	51	43			
2.0	86	77	70	77	70	65	82	74	67	74	68	63	74	68	63	69	64	60	63	58	64	60	51			
2.5	93	85	78	82	76	71	88	81	75	79	74	70	80	75	70	74	70	66	69	65	70	66	57			
3.0	99	92	86	86	82	78	94	88	83	84	79	76	85	81	76	79	75	72	74	71	75	72	62			
4.0	106	101	96	92	89	85	101	96	92	89	86	83	92	88	85	84	81	79	81	78	81	79	68			
5.0	111	107	103	95	93	90	106	102	98	93	90	88	96	93	90	87	85	83	85	83	85	83	72			