

型番：NT28100 (2606lm)



光度(cd/1000lm)			
	A-A	B-B	C-C
-180°	11	12	12
-170°	11	12	12
-160°	10	12	12
-150°	10	12	11
-140°	12	11	11
-130°	23	11	14
-120°	30	11	23
-110°	43	11	32
-100°	61	11	45
-90°	83	12	62
-80°	107	25	84
-70°	131	56	107
-60°	158	88	128
-50°	173	120	149
-40°	184	147	167
-30°	192	170	182
-20°	198	188	193
-10°	202	199	201
0°	204	204	204

光度(cd/1000lm)			
	A-A	B-B	C-C
0°	204	204	204
10°	203	202	203
20°	200	192	196
30°	194	175	185
40°	187	153	172
50°	177	127	155
60°	163	97	136
70°	140	64	114
80°	118	33	90
90°	92	13	69
100°	68	12	50
110°	47	11	36
120°	35	11	25
130°	24	11	14
140°	13	11	12
150°	10	11	12
160°	11	12	12
170°	11	12	12
180°	11	12	12

配光曲線図

光度 cd/1000lm

— A-A  
— B-B  
— C-C

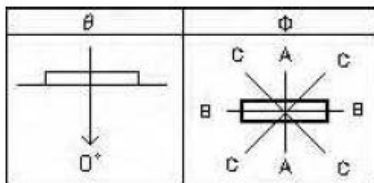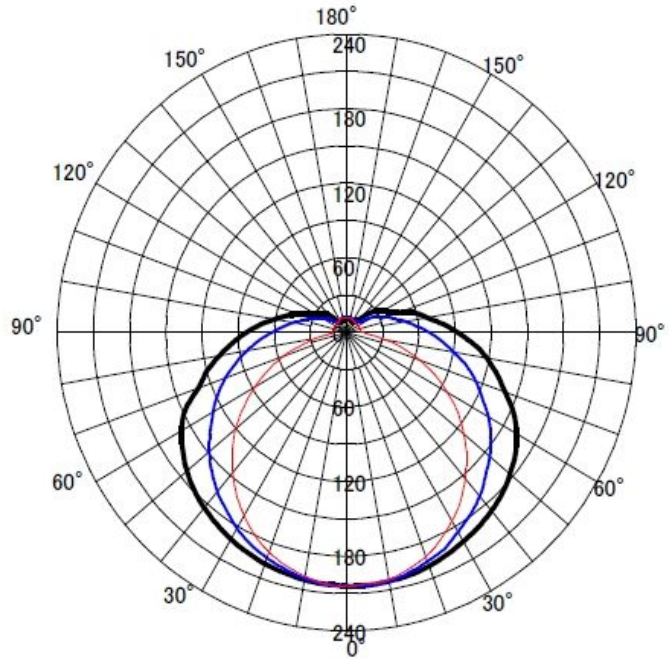

器具効率		最大取付間隔	保守率		
UP	16.7 %	A-A 1.43 H	良	中	否
100.3 %		B-B 1.27 H	74	70	64
DN	83.6 %				

反射率 (%)	天井	80						70						50						30				0	
		壁		床		壁		床		壁		床		壁		床		壁		床		壁		床	
		50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	30	10	30	10	0	
室指数		照明率 U ( × 0.01 )																							
0.6	41	31	25	39	30	25	39	30	25	37	30	24	36	29	23	35	28	23	27	22	28	23	19		
0.8	51	42	35	48	40	34	49	40	34	47	39	33	46	38	32	44	37	32	36	30	37	32	26		
1.0	60	50	43	56	48	41	58	49	42	54	46	40	53	45	39	51	44	39	43	37	44	39	33		
1.25	69	59	52	63	55	49	66	57	50	61	54	48	61	53	47	57	51	46	50	45	51	46	39		
1.5	76	66	58	69	61	55	72	64	57	66	60	54	66	59	53	62	56	51	55	50	56	51	44		
2.0	86	77	70	77	70	65	82	74	68	74	68	63	75	69	63	70	65	60	64	59	65	60	52		
2.5	93	85	78	82	77	72	89	82	76	80	75	70	81	75	71	75	71	67	70	66	71	67	58		
3.0	99	92	86	87	82	78	95	88	83	84	80	76	86	81	77	79	76	72	75	71	76	72	63		
4.0	107	101	96	92	89	86	102	97	92	90	86	84	92	89	85	85	82	80	81	79	82	80	69		
5.0	111	107	103	96	93	90	106	102	98	93	90	88	96	93	91	88	86	84	86	83	86	84	73		