


型番：NT28200 (5195lm)


配光曲線図

— A-A
— B-B
— C-C

光度 cd/1000lm

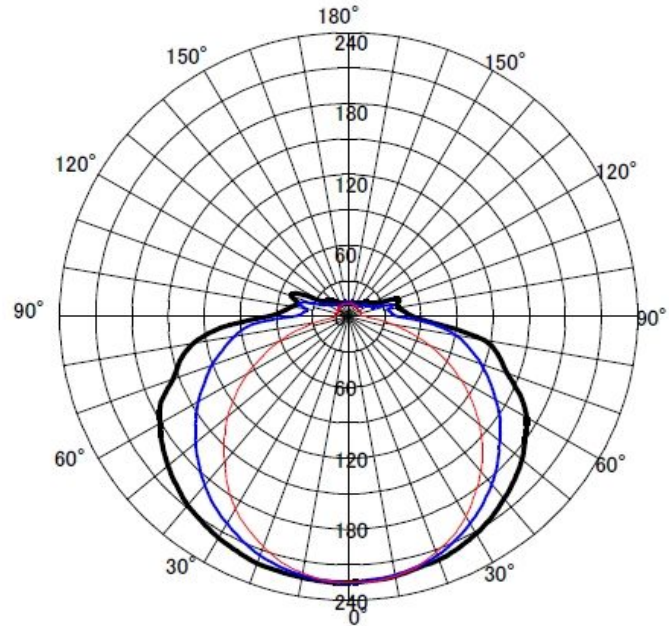

光度(cd/1000lm)				光度(cd/1000lm)			
	A-A	B-B	C-C		A-A	B-B	C-C
-180°	11	11	11	0°	225	225	225
-170°	11	11	12	10°	223	223	222
-160°	12	11	12	20°	219	212	215
-150°	12	11	11	30°	212	195	202
-140°	16	11	12	40°	201	171	185
-130°	21	11	16	50°	188	142	164
-120°	25	10	19	60°	171	108	141
-110°	51	10	32	70°	140	72	117
-100°	48	11	35	80°	114	36	90
-90°	67	11	46	90°	53	13	41
-80°	131	26	96	100°	42	11	33
-70°	155	61	121	110°	44	11	23
-60°	181	97	144	120°	22	10	18
-50°	196	131	166	130°	19	10	14
-40°	208	160	186	140°	14	11	12
-30°	216	188	202	150°	12	11	11
-20°	222	207	215	160°	12	11	12
-10°	224	220	222	170°	11	11	12
0°	225	225	225	180°	11	11	11

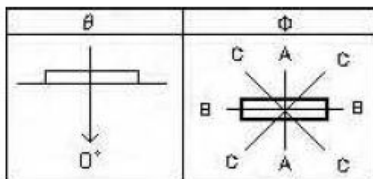

器具効率		最大取付間隔	保守率		
UP 12.6 %	99.6 %	A-A 1.41 H	良	中	否
DN 87.0 %		B-B 1.28 H	74	70	64

反射率 (%)	天井	80						70						50						30				0
	壁	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	30	10	30	10	0
	床	30		10		30		10		30		10		30		10		30		10		0		
室指数	照明率 U (× 0.01)																							
0.6	41	32	26	39	31	26	40	31	26	38	31	25	38	30	25	36	29	24	29	24	29	24	21	
0.8	52	43	36	49	41	35	51	41	35	48	40	34	47	39	34	45	38	33	37	32	38	33	29	
1.0	61	51	44	57	49	42	59	50	43	55	48	42	55	47	41	52	46	40	45	40	46	40	35	
1.25	70	60	53	64	57	50	68	59	52	63	55	50	63	55	49	59	53	48	52	47	53	48	42	
1.5	77	67	60	70	62	57	74	65	58	68	61	56	68	61	56	64	58	54	58	53	58	54	47	
2.0	87	79	72	78	72	66	84	76	70	76	70	65	77	71	66	72	67	63	66	62	67	63	56	
2.5	94	87	80	83	78	73	90	83	78	81	76	72	83	78	73	77	73	69	72	69	73	69	61	
3.0	100	93	88	88	83	79	96	90	85	86	81	78	88	84	79	81	78	75	78	74	78	75	67	
4.0	108	102	98	93	90	87	103	98	94	91	88	85	95	91	88	87	84	82	84	82	84	82	73	
5.0	112	108	104	96	94	91	107	104	100	94	92	90	98	96	93	90	88	86	88	86	88	86	77	