


型番：NV14100 (1221lm)

光度(cd/1000lm)				光度(cd/1000lm)			
	A-A	B-B	C-C		A-A	B-B	C-C
-180°	11	11	12	0°	194	194	194
-170°	11	11	12	10°	194	191	193
-160°	11	11	11	20°	191	181	186
-150°	10	10	11	30°	186	166	177
-140°	10	10	11	40°	179	146	163
-130°	32	10	11	50°	170	121	148
-120°	39	10	29	60°	158	90	128
-110°	55	9	37	70°	142	59	110
-100°	73	11	49	80°	124	30	90
-90°	92	11	66	90°	103	13	72
-80°	114	27	83	100°	82	11	55
-70°	133	54	109	110°	62	10	39
-60°	151	86	123	120°	46	10	31
-50°	164	116	141	130°	35	10	12
-40°	174	141	158	140°	11	10	11
-30°	181	163	172	150°	11	11	11
-20°	187	179	183	160°	11	12	11
-10°	192	190	191	170°	11	12	11
0°	194	194	194	180°	11	11	12

配光曲線図

光度 cd/1000lm

- A-A
- B-B
- C-C

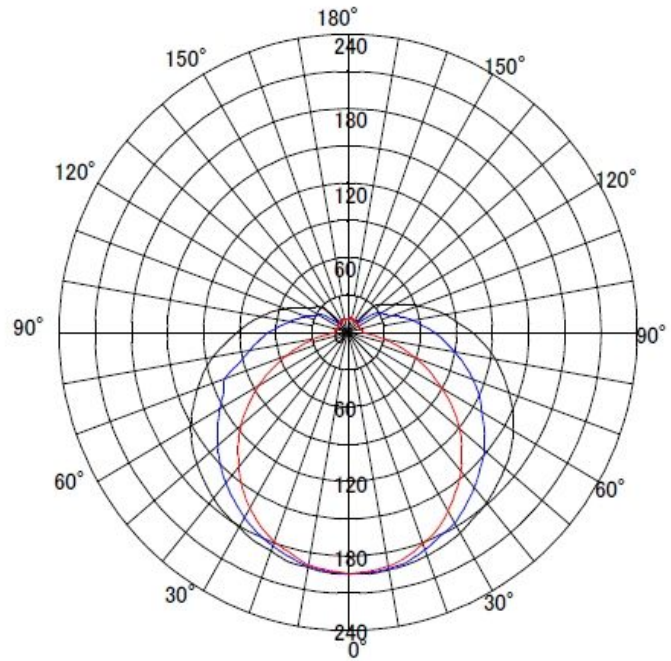

器具効率		最大取付間隔	保守率		
UP 18.9 %	99.9 %	A-A 1.44 H	良	中	否
DN 81.0 %		B-B 1.26 H	74	70	62

反射率 (%)	天井	80						70						50						30						0		
	壁	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	30	10	30	10	30	10	30	10	0
		床	30			10			30			10			30			10			30			10			0	
室指数	照明率 U (× 0.01)																											
0.6	40	31	25	38	30	24	38	30	24	37	29	24	36	28	23	34	27	23	26	22	27	23	18					
0.8	51	41	34	48	39	33	49	40	33	46	38	32	45	37	31	43	36	31	34	29	36	31	25					
1.0	59	49	42	55	47	41	57	48	41	53	45	40	52	44	38	49	43	38	41	36	43	38	31					
1.25	68	58	51	62	55	48	65	56	49	60	53	47	59	52	46	56	50	45	48	43	50	45	37					
1.5	75	65	58	68	60	54	71	63	56	65	59	53	65	58	52	61	55	50	53	49	55	50	42					
2.0	85	76	69	76	69	64	81	73	67	73	67	62	74	67	62	68	63	59	62	58	63	59	50					
2.5	92	84	78	81	76	71	88	81	75	79	73	69	79	74	69	73	69	65	68	64	69	65	56					
3.0	98	91	85	86	81	77	93	87	82	83	79	75	85	80	76	78	74	71	73	70	74	71	61					
4.0	106	100	95	92	88	85	101	96	91	89	86	83	91	87	84	83	81	78	80	77	81	78	67					
5.0	111	106	102	95	92	90	105	101	98	92	90	87	95	92	89	87	85	83	84	82	85	83	71					