


型番：NV14200 (2411lm)

配光曲線図

— A-A  
— B-B  
— C-C

光度 cd/1000lm

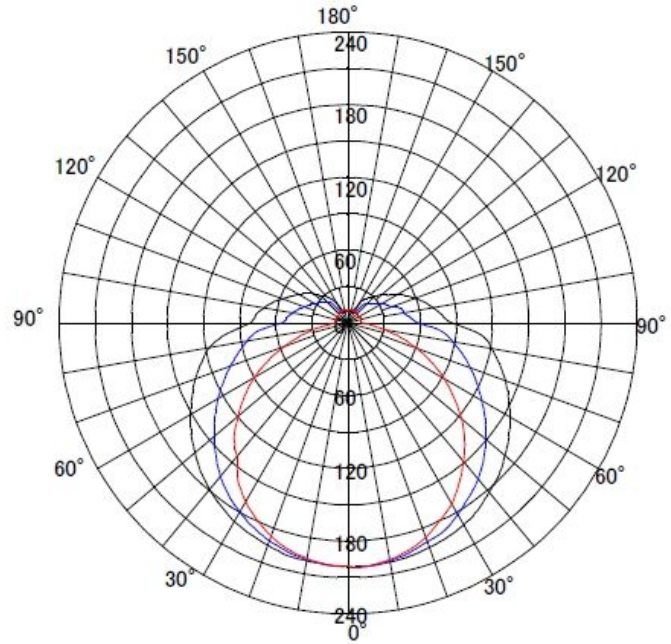

光度(cd/1000lm)			
	A-A	B-B	C-C
-180°	10	11	11
-170°	10	11	11
-160°	10	11	11
-150°	19	11	11
-140°	29	10	21
-130°	37	10	26
-120°	47	10	32
-110°	58	10	39
-100°	71	11	47
-90°	81	11	55
-80°	117	27	85
-70°	135	56	104
-60°	151	90	125
-50°	166	119	145
-40°	179	144	165
-30°	189	170	180
-20°	195	187	191
-10°	199	197	198
0°	201	201	201

光度(cd/1000lm)			
	A-A	B-B	C-C
0°	201	201	201
10°	200	198	199
20°	197	188	192
30°	192	172	182
40°	182	149	168
50°	170	123	149
60°	155	92	128
70°	139	60	108
80°	121	29	88
90°	86	12	58
100°	72	11	47
110°	59	11	39
120°	47	10	32
130°	36	10	24
140°	27	10	19
150°	19	11	11
160°	10	11	11
170°	10	11	11
180°	10	11	11

器具効率	最大取付間隔	保守率		
UP 18.6 %	A-A 1.43 H	良	中	否
99.7 %	B-B 1.26 H	79	74	70
DN 81.0 %				

反射率 (%)	天井	80						70						50						30				0
	壁	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	30	10	30	10	0
	床	30		10		30		10		30		10		30		10		30		10		0		
室指数	照明率 U ( × 0.01 )																							
0.6	40	31	25	38	30	25	39	30	25	37	30	24	36	29	23	35	28	23	27	22	28	23	19	
0.8	51	41	35	48	40	34	49	40	34	46	39	33	45	37	32	43	36	31	35	30	36	31	26	
1.0	60	50	43	56	47	41	57	48	41	54	46	40	53	45	39	50	43	38	42	37	43	38	32	
1.25	69	59	51	63	55	49	66	57	50	61	53	48	60	53	47	56	50	45	49	44	50	45	38	
1.5	75	66	58	68	61	55	72	63	56	66	59	54	65	58	53	61	56	51	54	49	56	51	43	
2.0	85	77	70	76	70	65	81	74	67	74	68	63	74	68	63	69	64	60	62	58	64	60	51	
2.5	92	85	78	82	76	71	88	81	75	79	74	69	80	74	70	74	70	66	68	64	70	66	56	
3.0	98	91	86	86	81	77	94	87	82	83	79	75	85	80	76	78	75	71	73	70	75	71	61	
4.0	106	100	96	92	88	85	101	96	92	89	86	83	91	88	84	83	81	79	80	78	81	79	68	
5.0	111	106	102	95	92	90	105	101	98	92	90	88	95	92	90	87	85	83	84	82	85	83	72	