


型番：NV28100 (2605lm)

配光曲線図

— A-A  
— B-B  
— C-C

光度 cd/1000lm

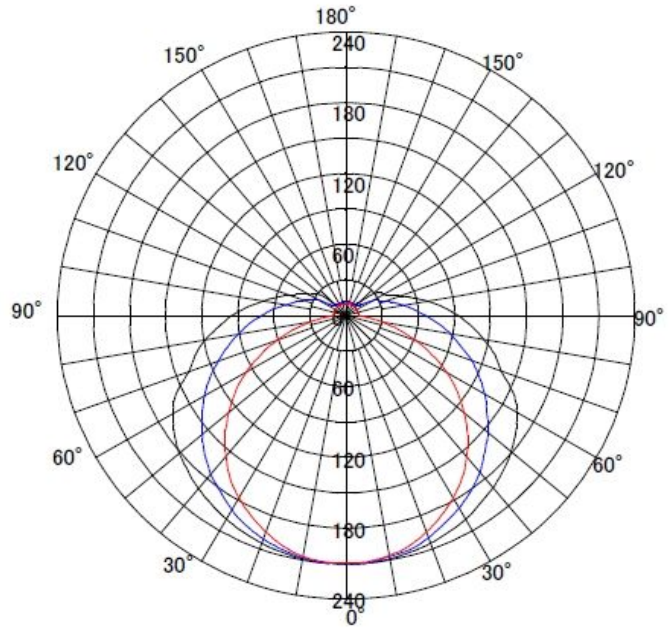

光度(cd/1000lm)			
	A-A	B-B	C-C
-180°	11	11	12
-170°	11	10	12
-160°	10	10	12
-150°	10	10	12
-140°	13	10	11
-130°	27	10	14
-120°	35	10	27
-110°	50	10	37
-100°	70	10	51
-90°	95	11	70
-80°	119	29	91
-70°	139	61	113
-60°	166	96	136
-50°	181	127	156
-40°	191	155	175
-30°	199	178	190
-20°	205	195	201
-10°	209	207	208
0°	210	210	210

光度(cd/1000lm)			
	A-A	B-B	C-C
0°	210	210	210
10°	209	206	207
20°	205	195	200
30°	199	178	188
40°	190	156	173
50°	179	128	154
60°	164	97	133
70°	137	62	111
80°	116	29	88
90°	93	11	66
100°	69	10	49
110°	48	10	35
120°	36	10	25
130°	27	10	14
140°	13	10	12
150°	10	10	11
160°	11	11	12
170°	11	11	12
180°	11	11	12

器具効率		最大取付間隔		保守率		
UP	16.5 %	A-A	1.42 H	良	中	否
	100.0 %					
DN	83.5 %	B-B	1.26 H	74	70	64

反射率 (%)	天井	80						70						50						30				0
	壁	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	30	10	30	10	0
		床	30		10		30		10		30		10		30		10		30		10		0	
室指数		照明率 U ( × 0.01 )																						
0.6		41	32	26	39	31	25	39	31	25	38	30	25	37	29	24	35	28	24	27	23	28	24	19
0.8		52	42	35	49	40	34	50	41	34	47	39	33	46	38	33	44	37	32	36	31	37	32	27
1.0		61	51	43	56	48	42	58	49	42	54	47	41	54	46	40	51	44	39	43	38	44	39	33
1.25		69	60	52	64	56	50	67	58	51	62	54	49	61	54	48	58	51	46	50	45	51	46	40
1.5		76	66	59	69	62	56	73	64	57	67	60	55	67	60	54	63	57	52	56	51	57	52	45
2.0		86	78	71	77	71	66	83	75	68	75	69	64	76	69	64	70	65	61	64	60	65	61	53
2.5		94	86	79	83	77	72	89	82	76	80	75	71	81	76	71	75	71	67	70	66	71	67	58
3.0		99	93	87	87	82	78	95	89	84	85	80	77	87	82	78	80	76	73	75	72	76	73	64
4.0		107	102	97	93	89	86	102	97	93	90	87	84	93	89	86	85	82	80	82	80	82	80	70
5.0		112	107	103	96	93	91	106	103	99	93	91	89	97	94	91	88	86	85	86	84	86	85	74